




Structural Lift:

Structural lift is designed to meet vertical mobility needs in public and private buildings. This is used instead of civil structure where it is not available and lesser time line. 100% strengthen equals to civil structures. It can be customized.




MR Machine Room:

Remain six feet 6W6L6H Required for machine installation, lockable door, Smoke window And Ladder to be provided for machine room. Machine room must be protected from water.



MRL Machine Roomless:

Machine room not required. only 4 feet height of head room enough for machine installation. machine will be installed on ISM beam. smoke window mandatory for head room.

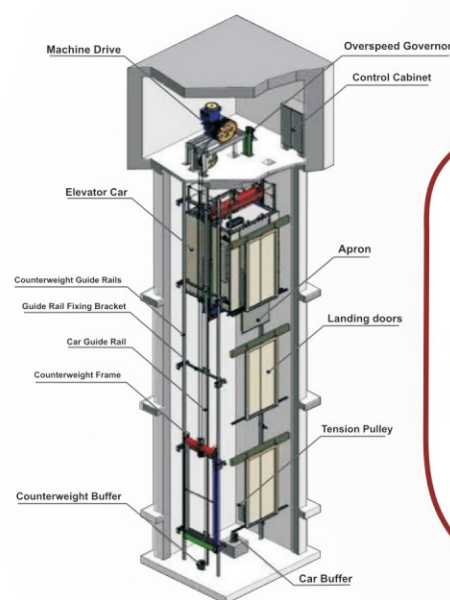

User's Safety Features:

- * Intercom
- * Firemen & Emergency Alarm
- * Over Load Device.
- * OSG Over Speed Governor
- * Handrail & Mirror in Cabin.
- * Infrared Door Sensor.
- * Manual / Auto evacuation (ARD).
- * 100% Safe Travel.
- * Quality of Installation & Service.
- * Free from Noise.
- * Experienced and skilled man power.
- * 100% Customer Satisfaction.



Our Manufacturing Units



Programming Unit



For Trade enquiries Contact :

Plot No.: A-28 & 29/8, A.P.I.E, Balnagar, Hyderabad-500037, Telangana
Mobile : 9550166294, +91 9642227722
E-mail : zeltronelevators@gmail.com
www.zeltronelevators.com www.zeltronelevators.in




- * Passenger Lifts
- * Goods Lifts
- * Home Lifts
- * Hydraulic Lifts
- * Traction Lifts
- * Hospital Lifts
- * MR/MRL Lifts
- * Dump Waiter
- * Capsule Lifts
- * Manual /Auto Lifts
- * Customized Lifts



An ISO 9001: 2015



Our Products

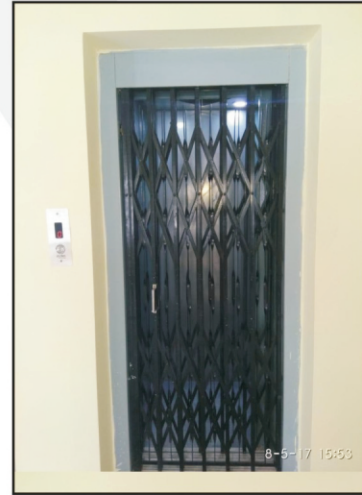

MANUAL GATE

Manual Gate:

Minimum required lift well dimensions are 1000/1200 mm and the starting entrance opening available from 600mm to 3000mm. Manual Gate Lift can be customized for any dimensions or conditions. Available in low budget and easy to maintain. Manual Gate Lifts are not approved From BOCW(Building and other construction works) act.

Swing Doors:

Minimum required lift well dimensions are 1200/1200mm and the starting entrance opening available from 600mm to 900mm. Manually operating of landing and car entrance doors. Swing Door Lift can be customized for any dimensions or conditions. Swing doors are available in MS, SS and Glass in various visions.




SS AUTO DOOR WITH BIG VISION



SS GLASS AUTO DOOR FULL VISION



SS FULL VISION

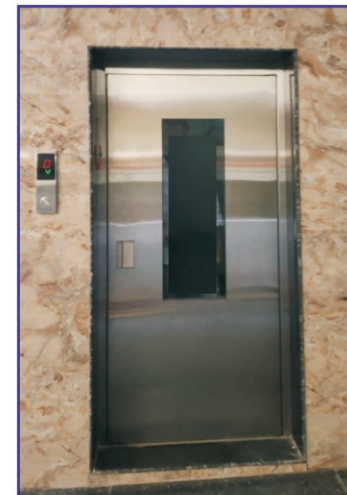

SS MID VISION

Auto Doors:

The future trends of automatic door will be more technology, personalized, maintenance free, diversification, comfortability, high security and safety.

Auto Door available in MS, SS and glass, availability of Entrance lift opening from 600 to 1500mm.



Hospital Bed Lift:

Hospital Bed Lift can accomodate the patient along with the attender in comfortable and safe manner. The capacity of the elevator from 884kg's to 2500kg's and the availability of speed range from 0.65 mtr/sec to 2mtr/sec.



Goods Lifts:

Goods Lifts are applicable where there is a need to shift goods between different floors, goods lift is used to lift heavy weight materials and major space materials. Good lift are available in manual gate and auto doors, the availability of opening from 1200mm to 3000mm and the capacity of goods lift from 1000kgs to 10000kgs max and we can customised for any ranges (Size, height, opening & capacity).



HYDRAULIC HOME LIFT

Hydraulic Home Lifts:

A hydraulic lift is a device for moving objects using force created by pressure on a liquid inside a cylinder that moves a piston upward. incompressible oil is pumped into the cylinder, which forces the piston upward force. The hydraulic system is used to lift the cabin platforms; Minimum required space is 1200/1500mm for 4 to 6 passengers.

Hydraulic Elevator suits for home elevators and it can be used up to G+3v floor and speed of the elevator from 0.4mtr/sec to 0.5mtr/sec.

Advantages: Pit and head room is not required and no free fall.



HYDRAULIC MECHANISM



Platform Lift:

Platform Lift Offer the privacy of an elevator at the price of stair lift they can serve two or more floors by taking a small number of people or upto two wheelchair users, up or down in an enclosed shift.



Industrial Lift:

they are used to transport rawmaterials, equipments and finished products from one level to another. With easy access and industrial safety norms.



Dump Waiter Lift:

Is a small freist elevator or lift intended to carry food and wastage. Dumb waiters found within modern structures including both commercial, public and private buildings, are often connected between multiple floors.